



**REQUIRED UTILITIES:**  
ELECTRICAL: 208-230VAC 50/60 HZ SINGLE PHASE, 6A MAX  
VACUUM: 20" HG(33kPa) -1/4" PTC OR 1/4" FNPT  
DRAIN: 3/4" OD BARB  
EXHAUST: 1.5" OD BARB-0.4" H2O @ 30CFM (100Pa @ 50CMH)  
N2/CDA (FOR AUTO-DISPENSES): 70 psi(482kPa)-1/4" PTC OR 1/4" FNPT



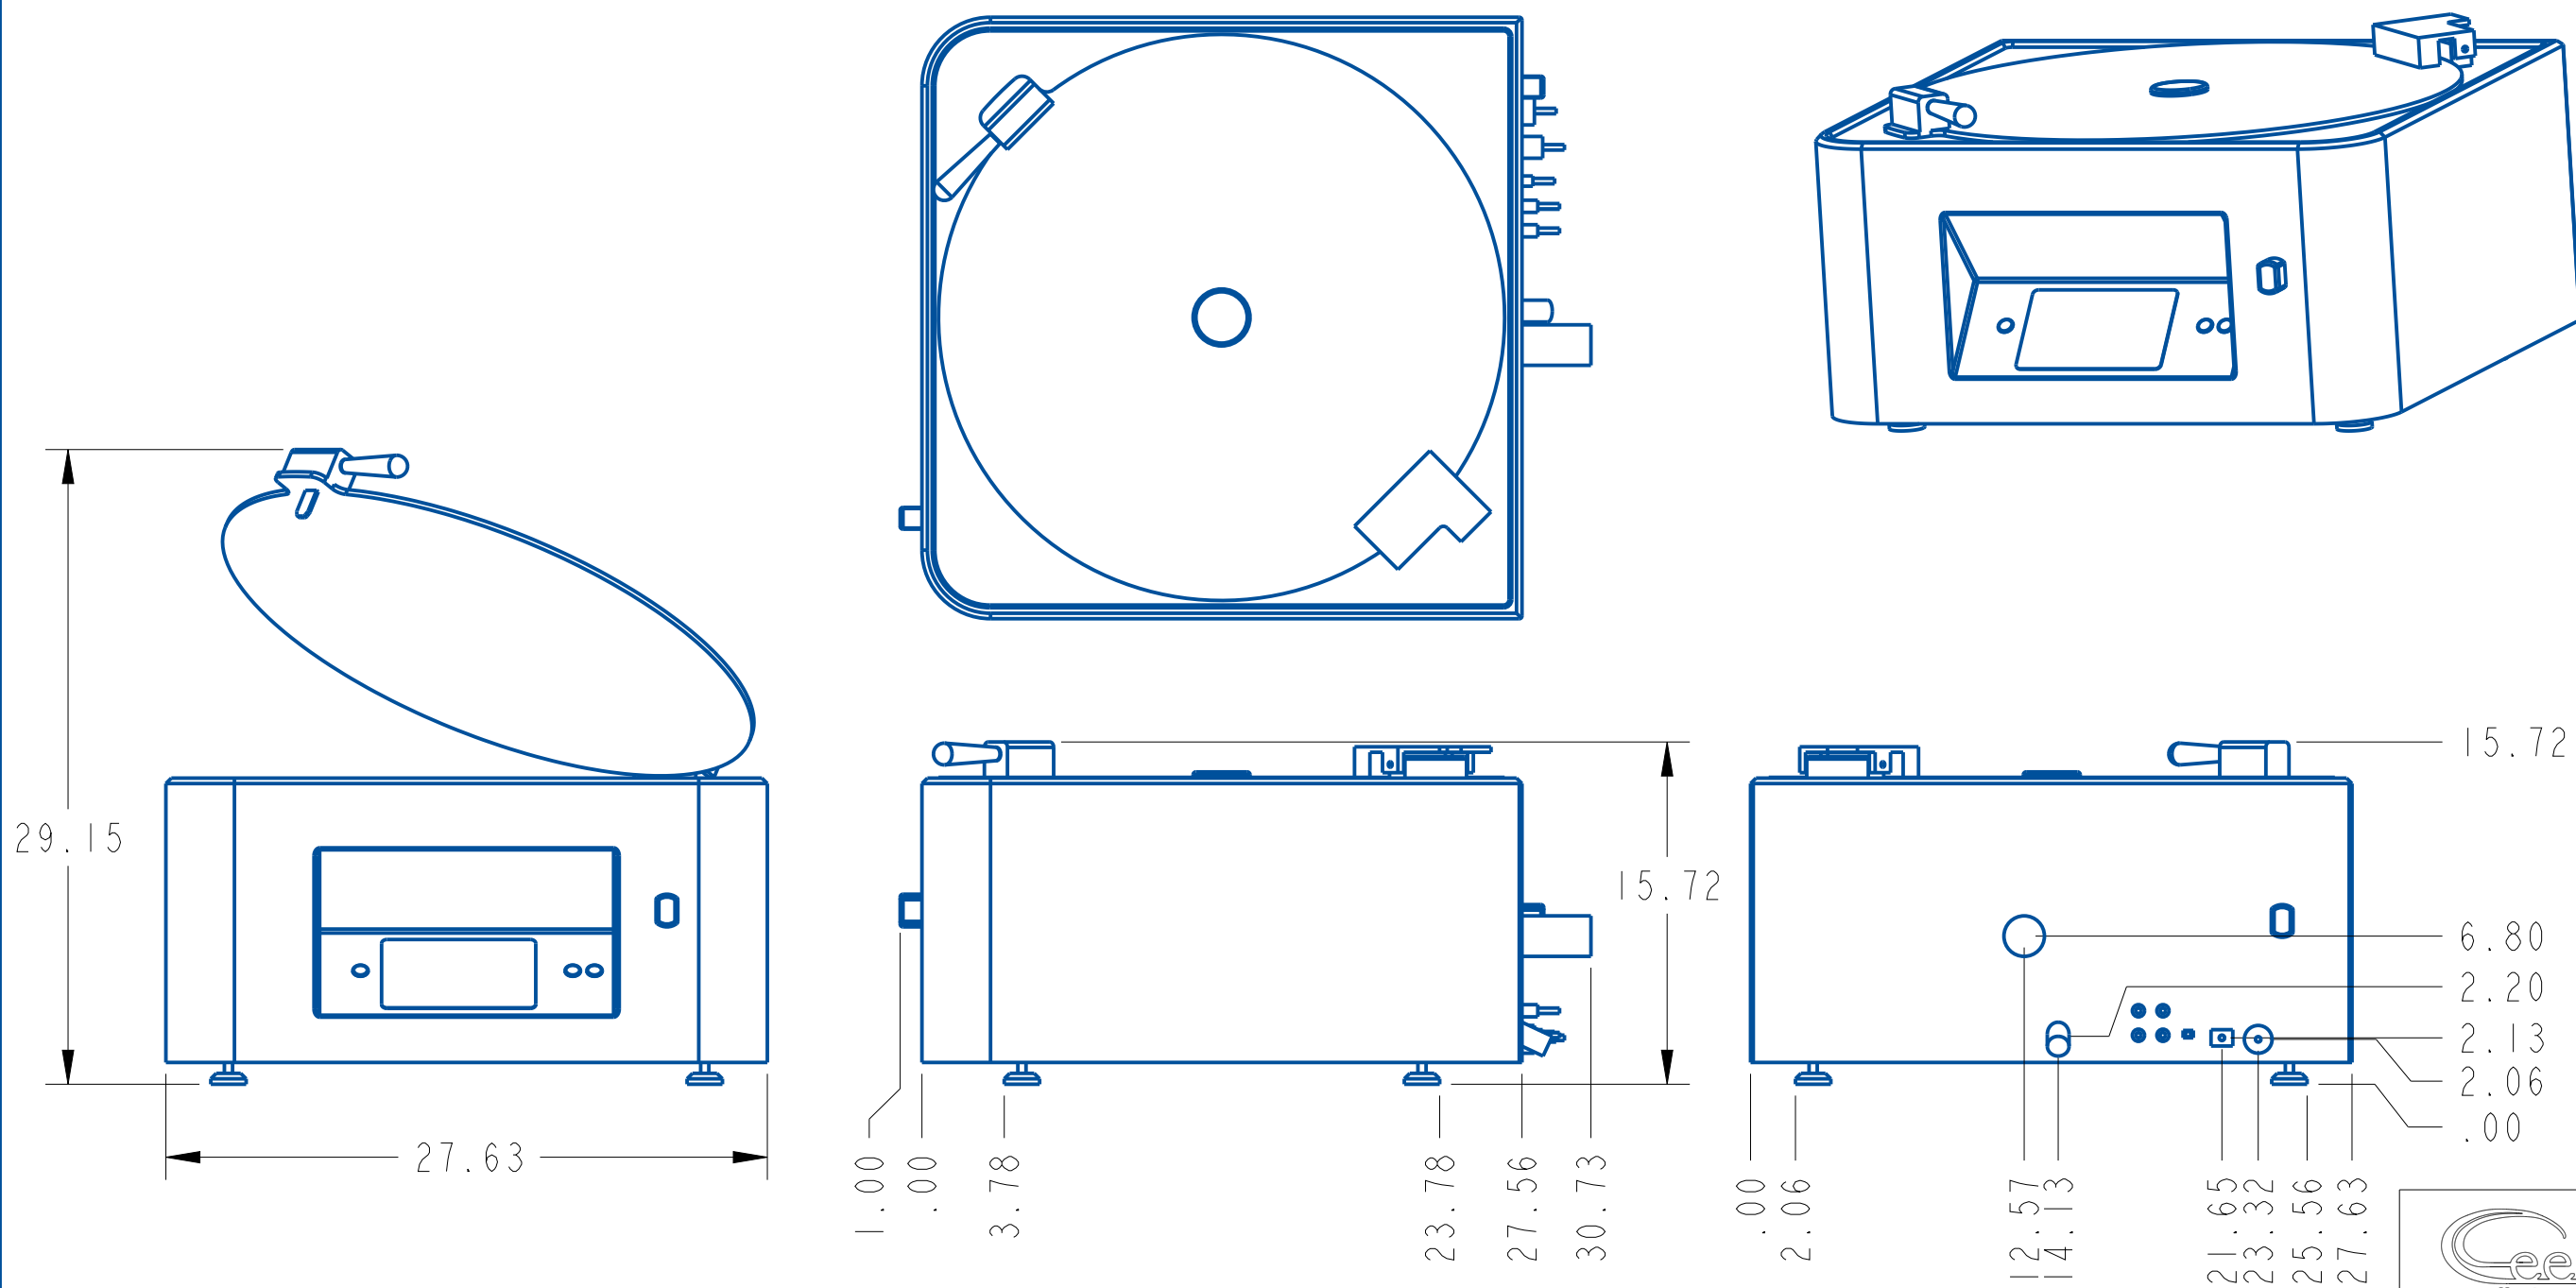

Cost Effective Equipment  
www.costeffectiveequipment.com

TITLE Apogee® 450 Spin Coater Benchtop	
REV A	PART # A-B-SC3-2
ALL DIMENSIONS ARE IN INCHES	