
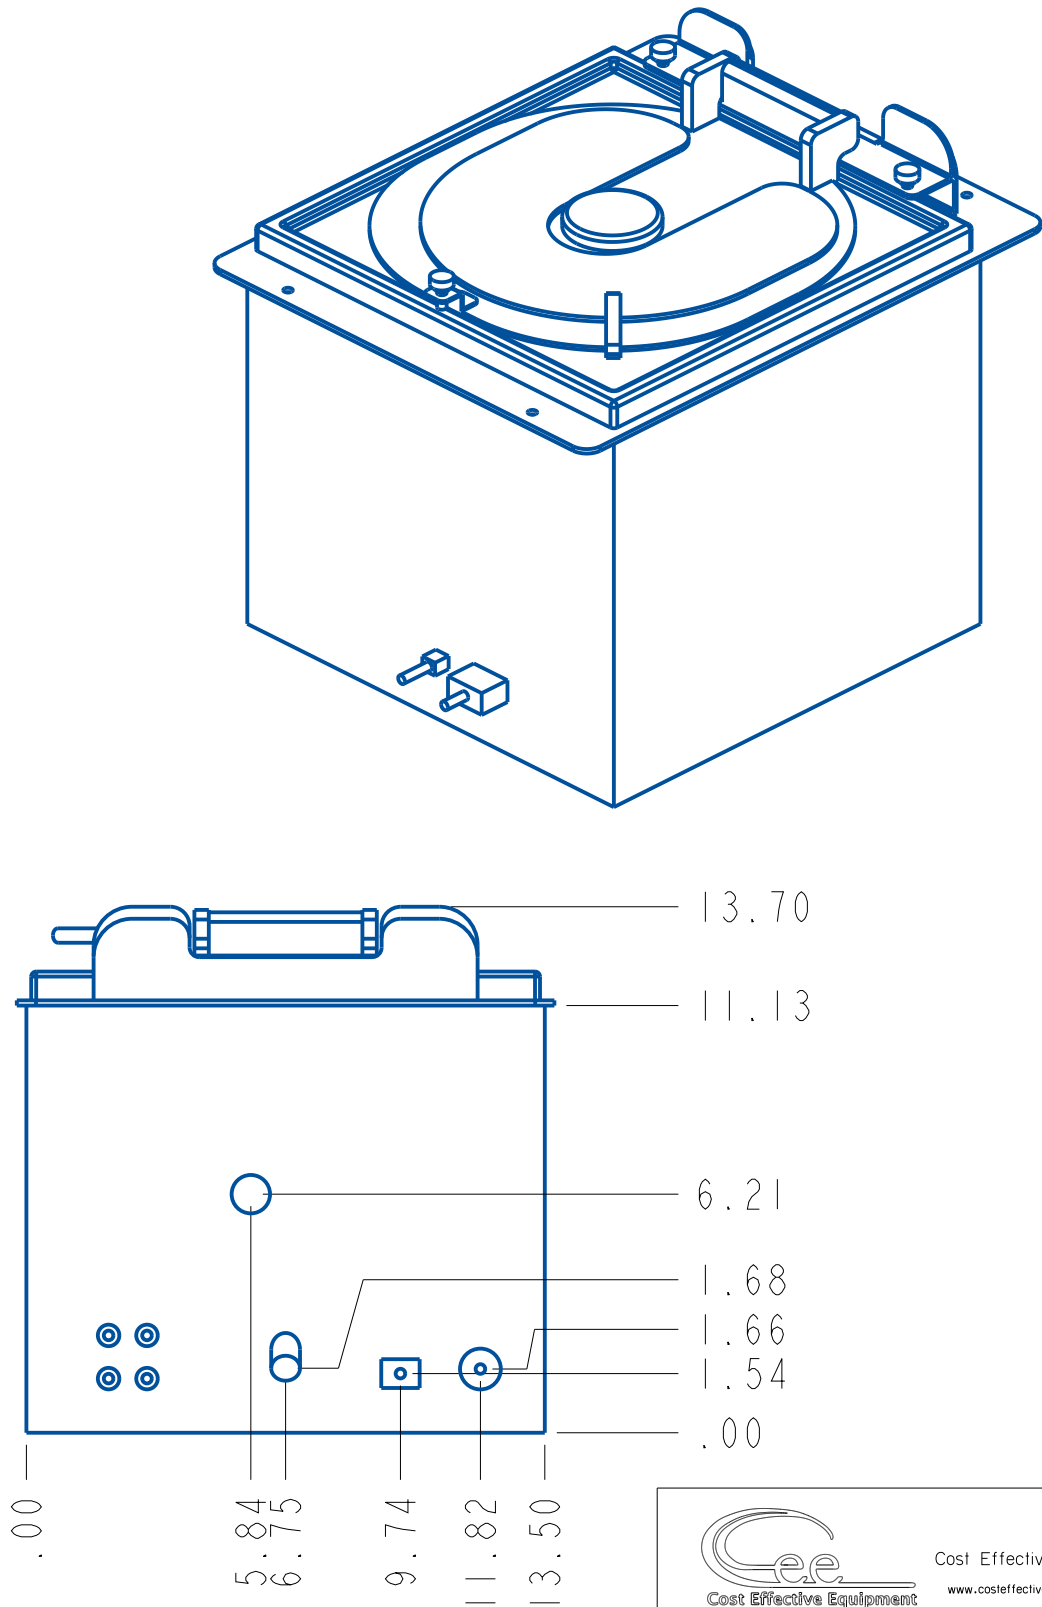
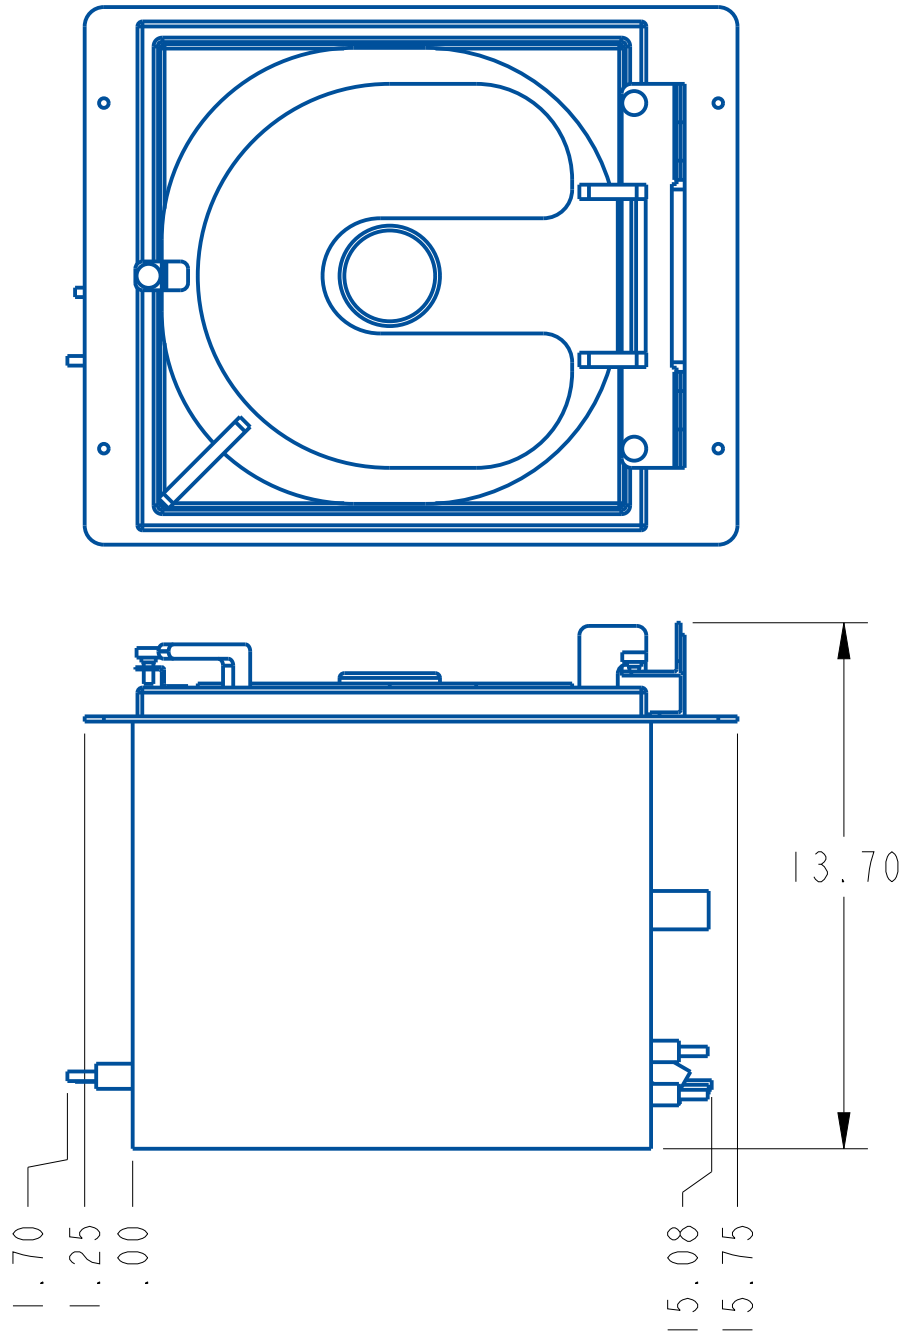



REQUIRED UTILITIES:

ELECTRICAL: 100-120 OR 208-230VAC
50/60 HZ SINGLE PHASE, 6A MAX
VACUUM: 20" HG(33kPa) -1/4" PTC OR 1/4" FNPT
DRAIN: 3/4" OD BARB
EXHAUST: 1" OD BARB-0.4" H2O @ 5.8CFM (100Pa @ 10CMH)
N2/CDA (FOR AUTO-DISPENSES): 70 psi(482kPa)-1/4" PTC OR 1/4" FNPT

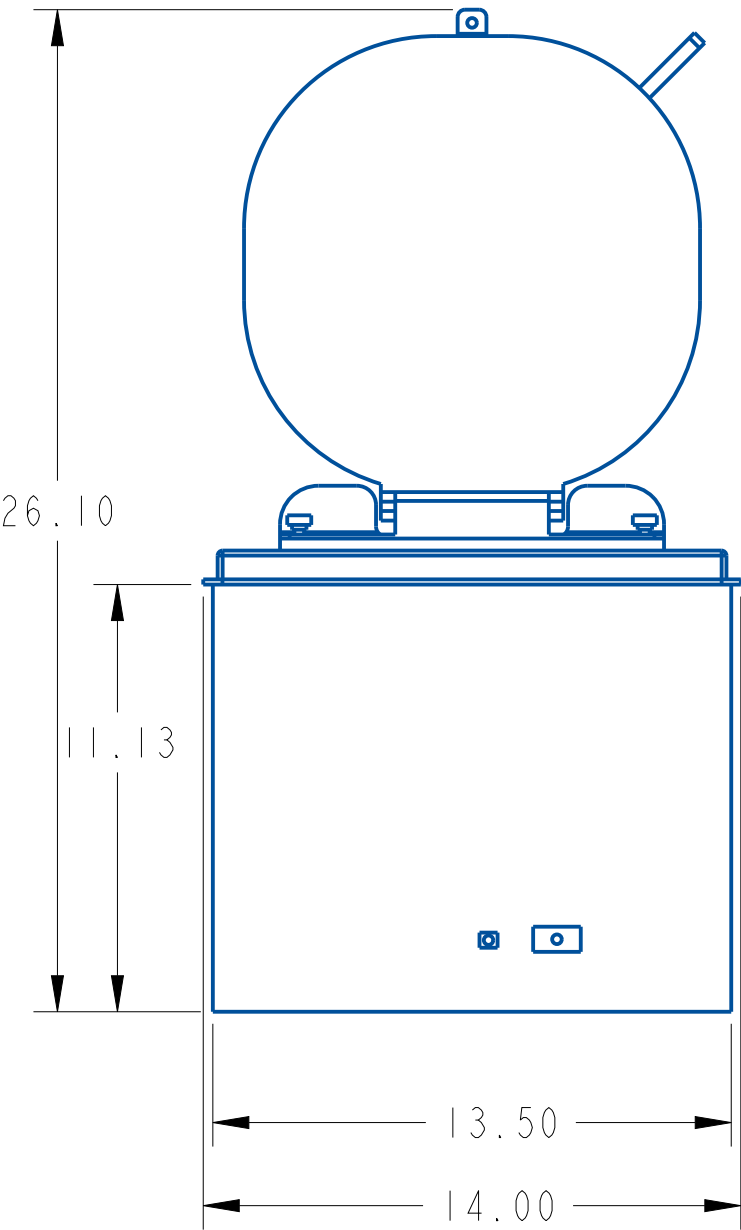

 Cost Effective Equipment		Cost Effective Equipment www.costeffectiveequipment.com	
TITLE Apogee® Spin Coater Flange-Mount			
REV A		PART # A-F-SC2	
ALL DIMENSIONS ARE IN INCHES			