

REQUIRED UTILITIES:


ELECTRICAL: 208-230VAC 50/60 HZ SINGLE PHASE, 6A MAX

VACUUM: 20" HG(33kPa) -1/4" PTC OR 1/4" FNPT

DRAIN: 3/4" OD BARB

EXHAUST: 1.5" OD BARB-0.4" H2O @ 30CFM (100Pa @ 50CMH)

N2/CDA (FOR AUTO-DISPENSES): 70 psi(482kPa)-1/4" PTC OR 1/4" FNPT

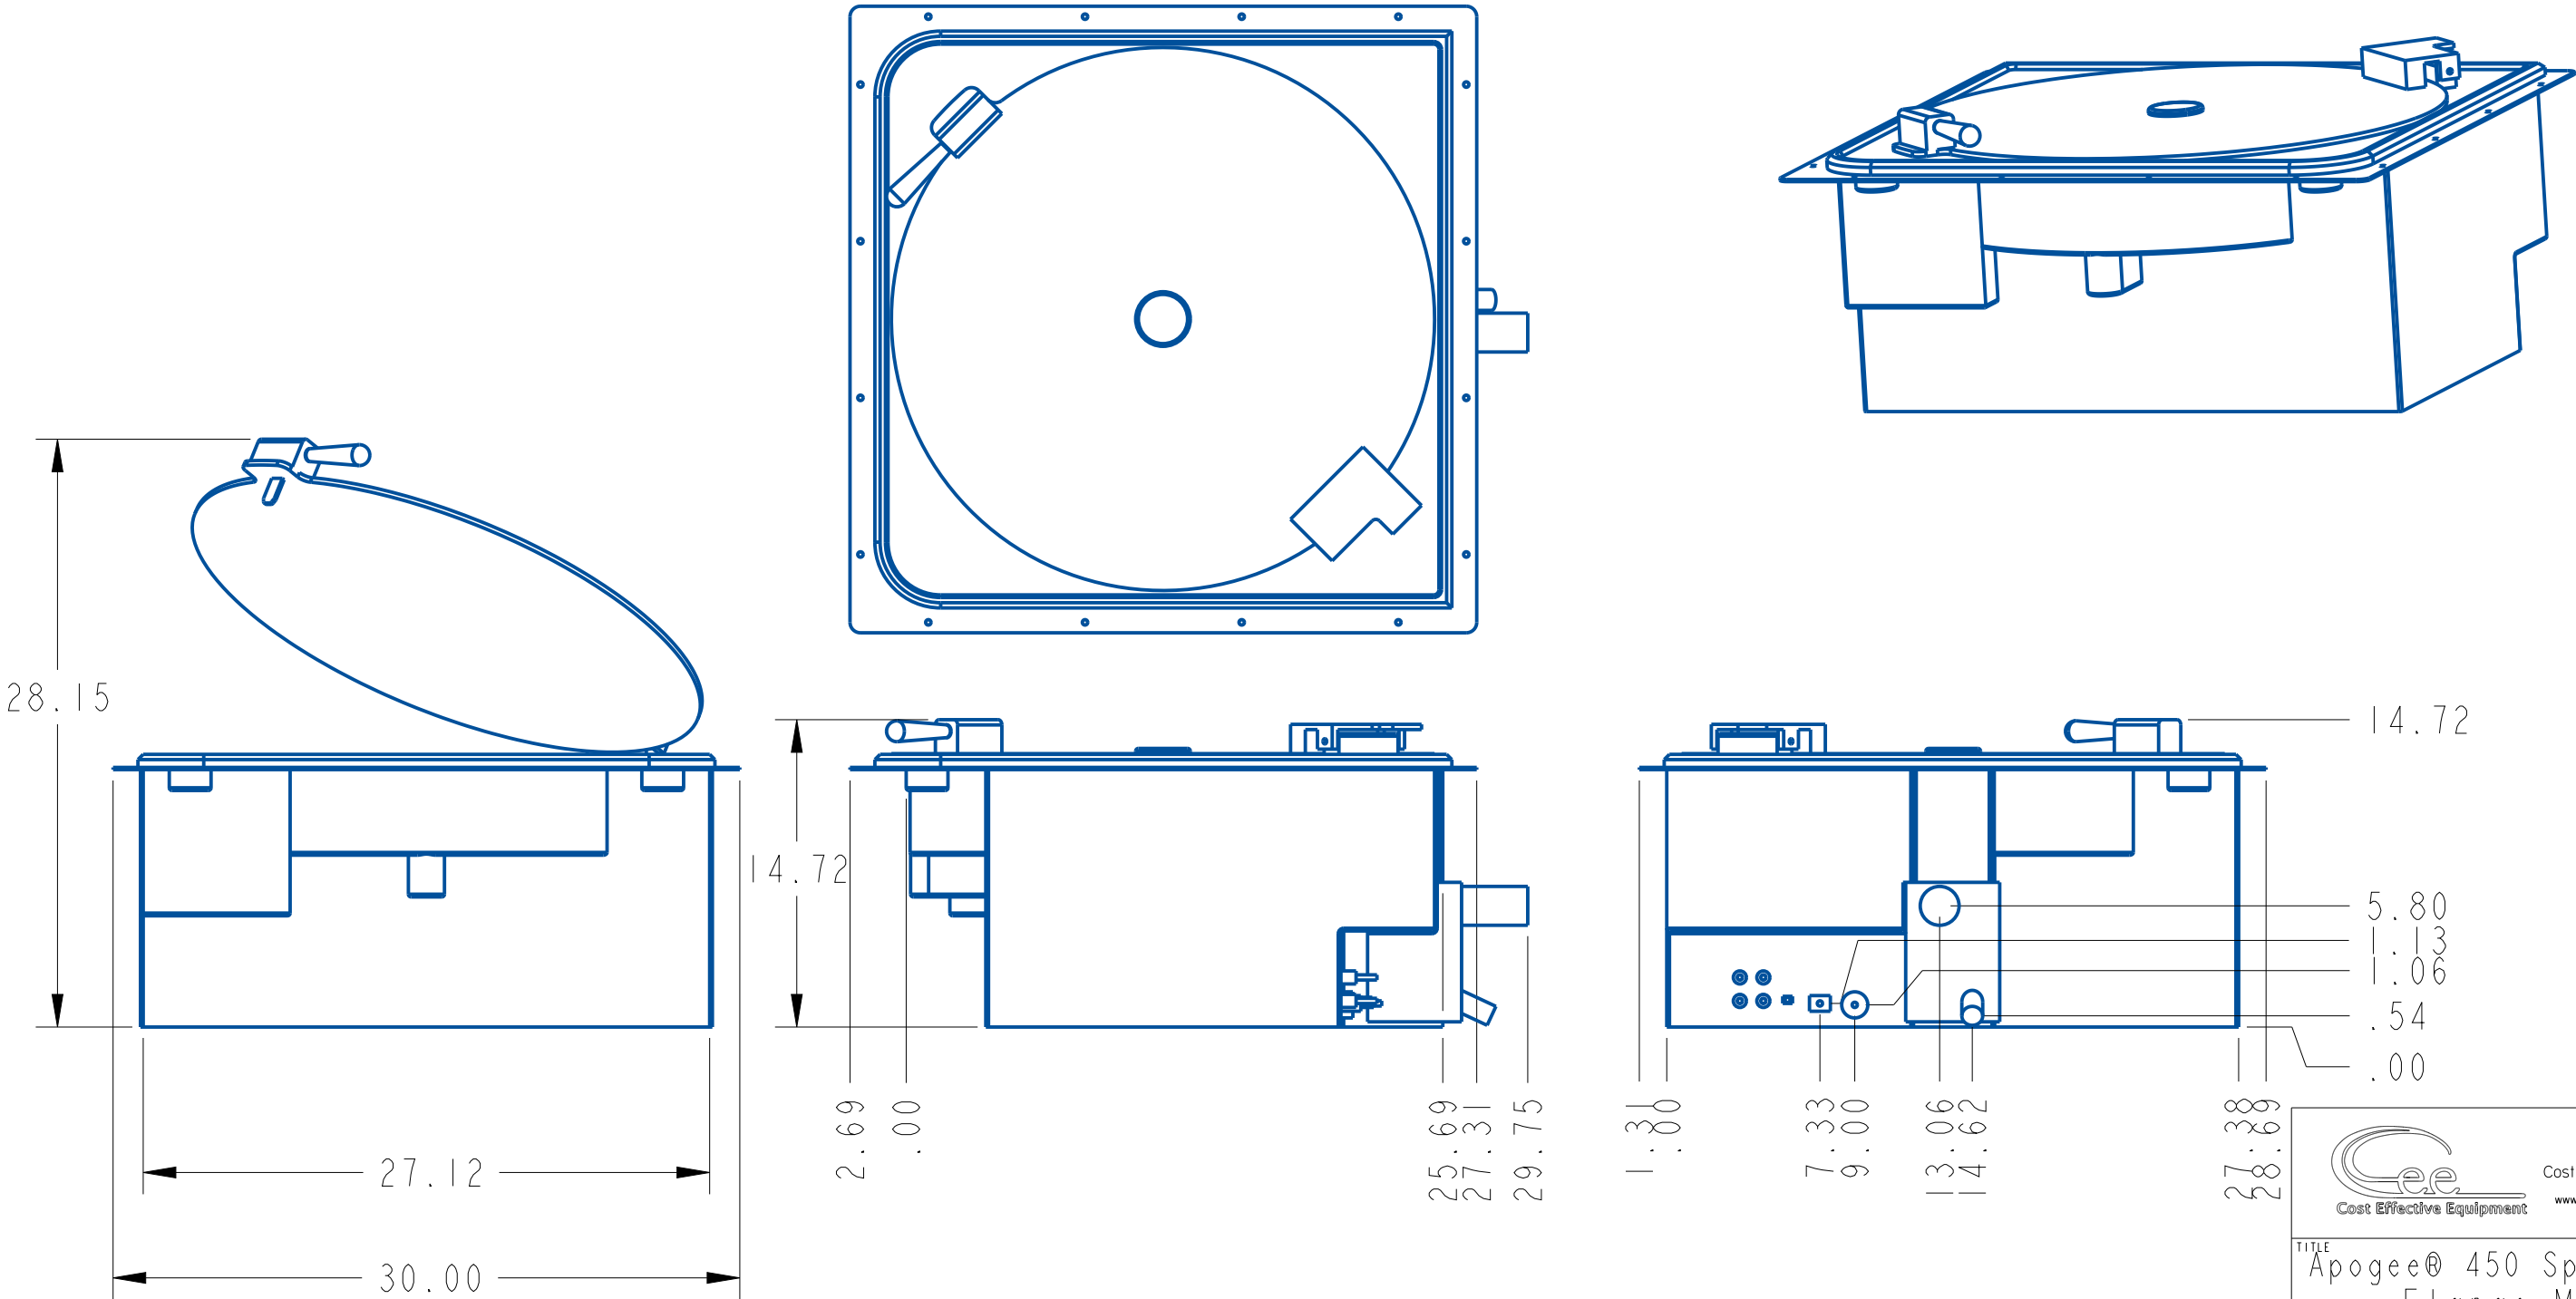



Cost Effective Equipment  
www.costeffectiveequipment.com

|                                                  |                     |
|--------------------------------------------------|---------------------|
| TITLE<br>Apogee® 450 Spin Coater<br>Flange Mount |                     |
| REV<br>A                                         | PART #<br>A-F-SC3-2 |
| ALL DIMENSIONS ARE IN INCHES                     |                     |