

REQUIRED UTILITIES:






ELECTRICAL: 208-230VAC 50/60 HZ SINGLE PHASE, 6A MAX

VACUUM: 20" HG(33kPa) -1/4" PTC OR 1/4" FNPT

DRAIN: 3/4" OD BARB

EXHAUST: 1.5" OD BARB-0.4" H2O @ 30CFM (100Pa @ 50CMH)

N2/CDA (FOR AUTO-DISPENSES): 70 psi(482kPa)-1/4" PTC OR 1/4" FNPT

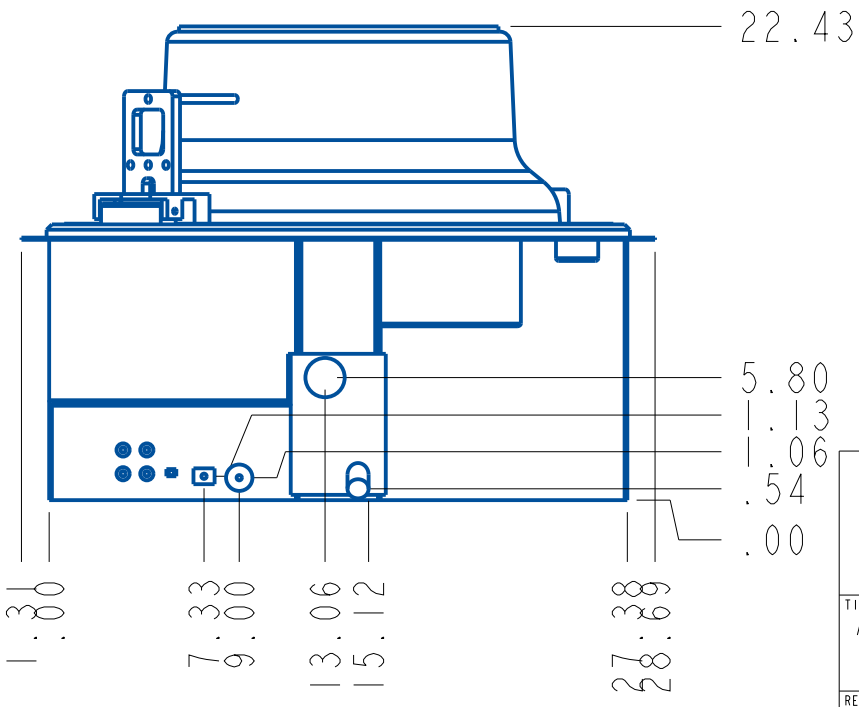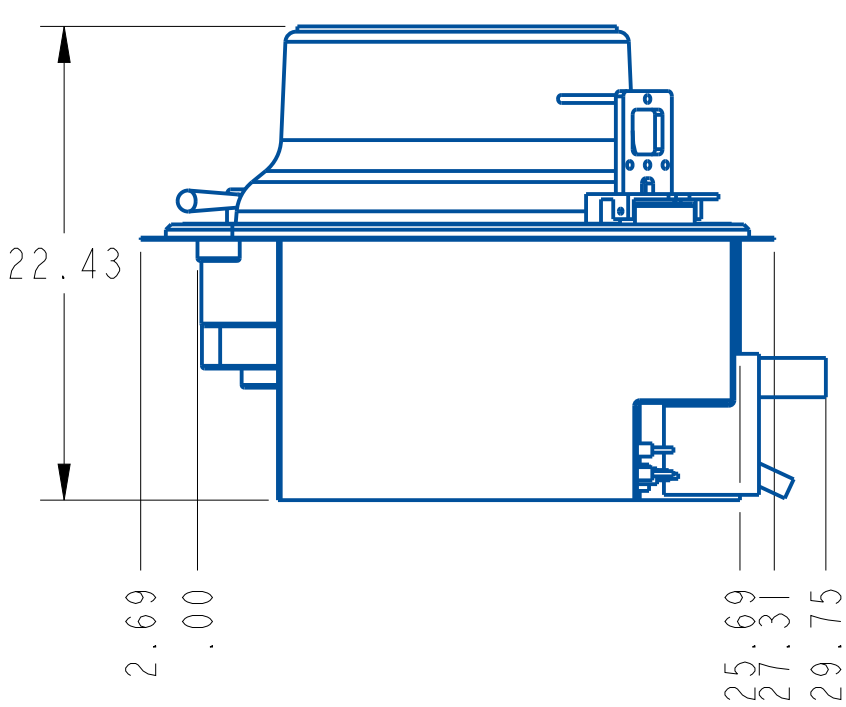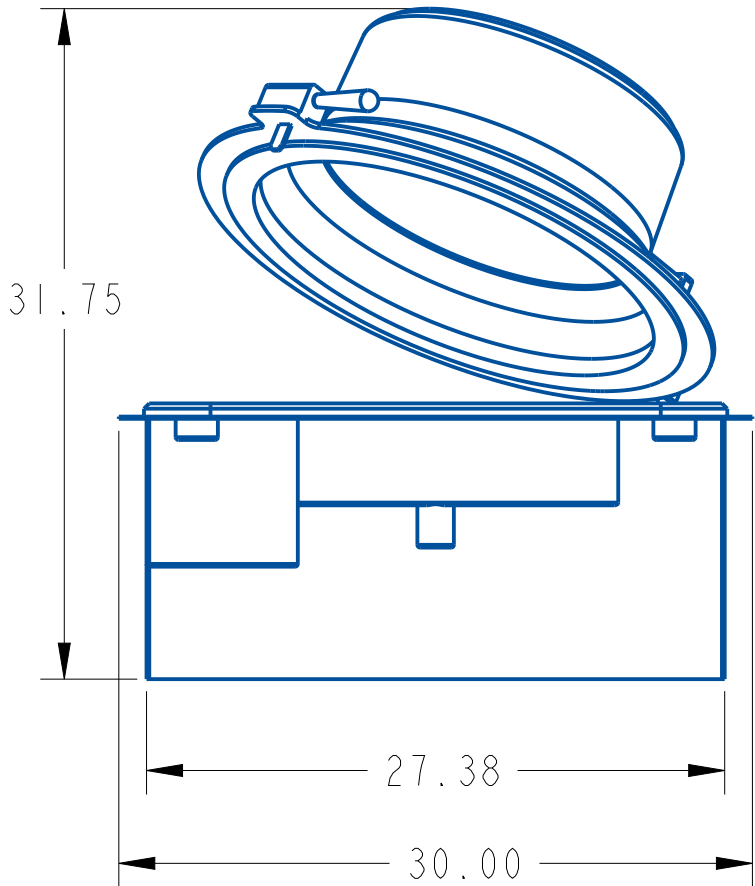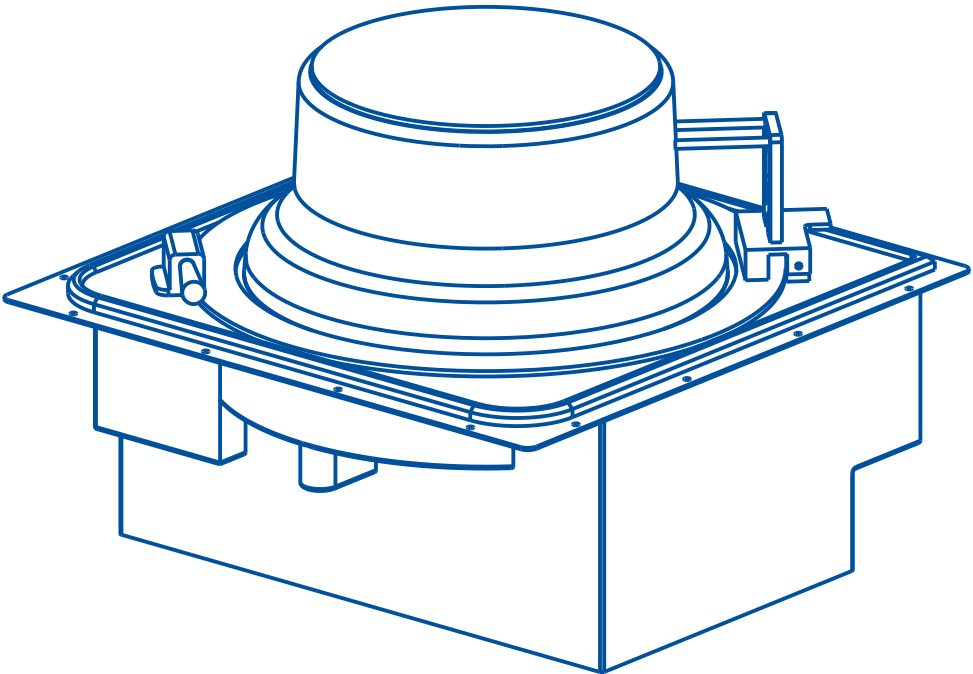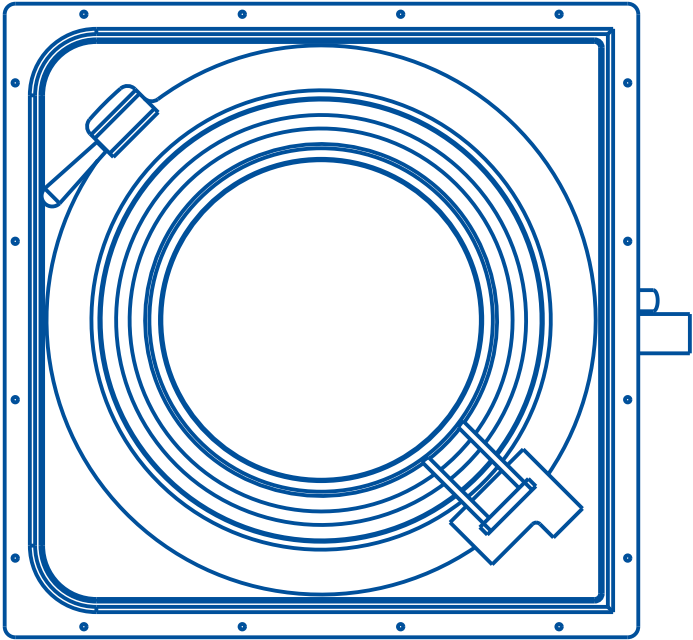

 Cost Effective Equipment		Cost Effective Equipment www.costeffectiveequipment.com	
TITLE Apogee®450 Spin Developer Flange Mount			
REV A		PART # A-F-SD3	
ALL DIMENSIONS ARE IN INCHES			