
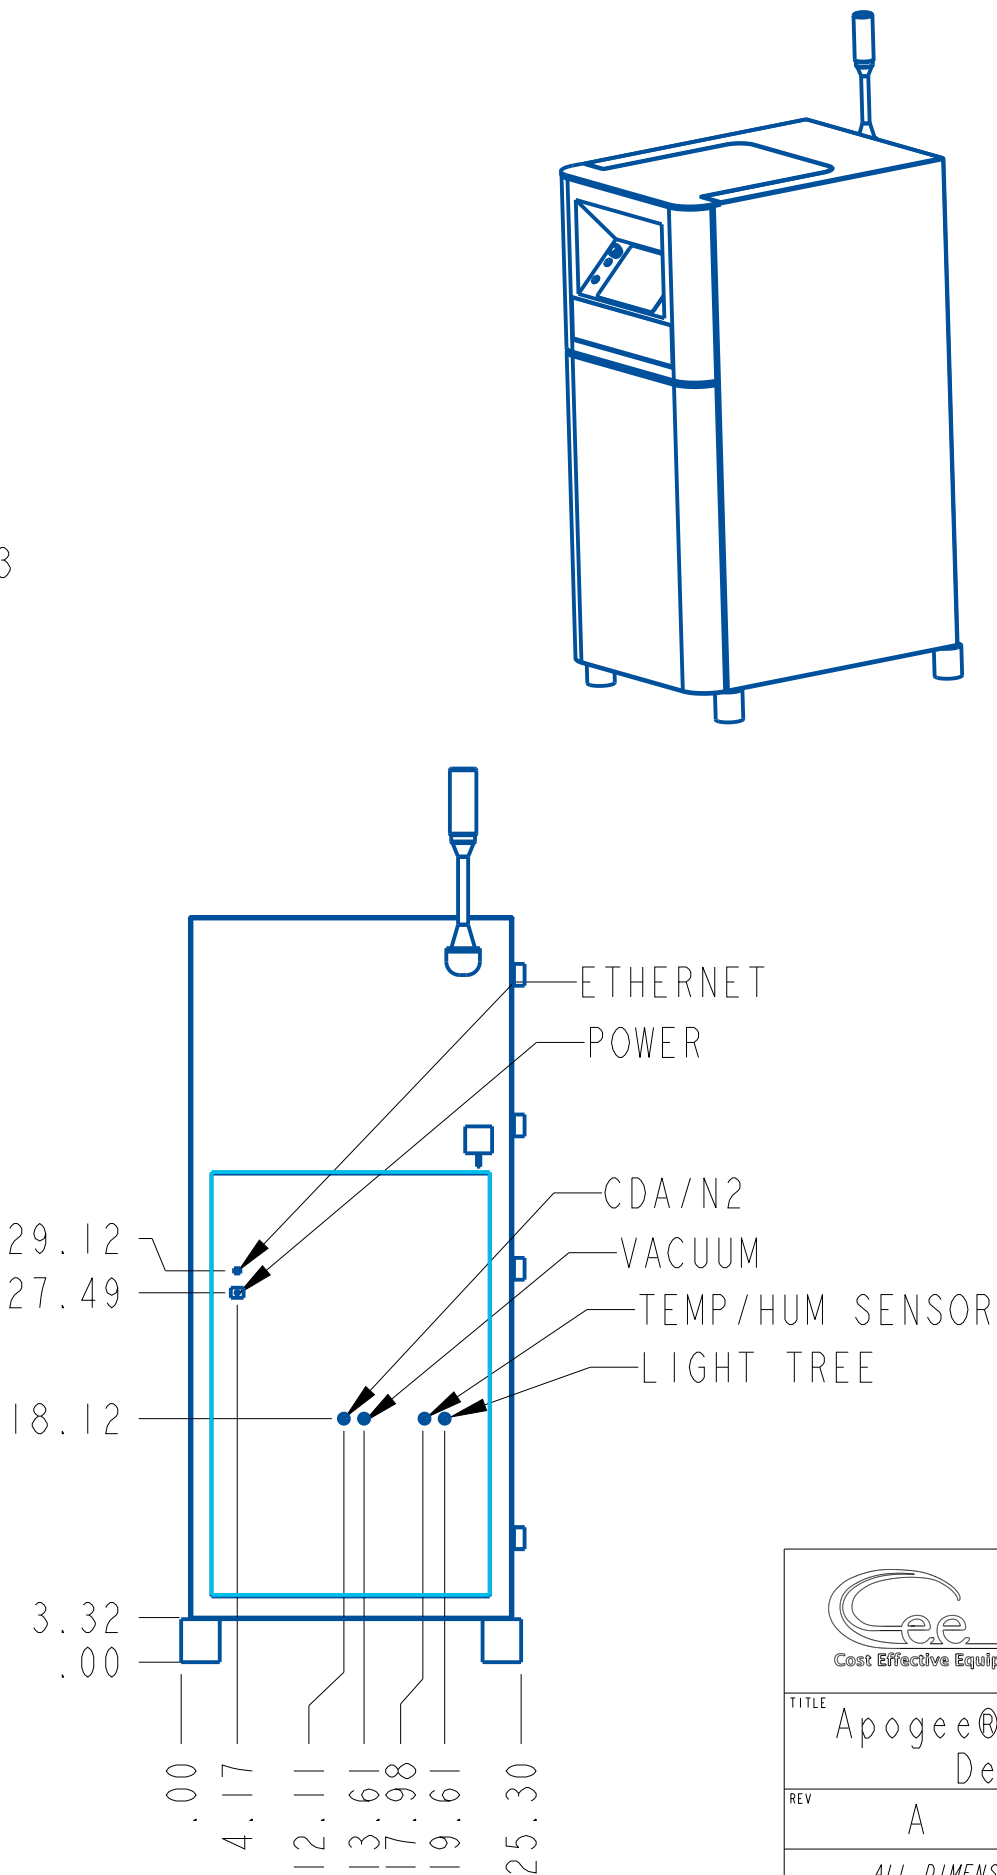


REQUIRED UTILITIES:
ELECTRICAL: 100-120 or 208-230VAC 50/60 HZ SINGLE PHASE, 9.5A MAX, 950 WATTS
VACUUM: 20" HG(33kPa) -1/4" PTC OR 1/4" FNPT
N2/CDA: 70 psi(483kPa)-1/4" PTC OR 1/4" FNPT

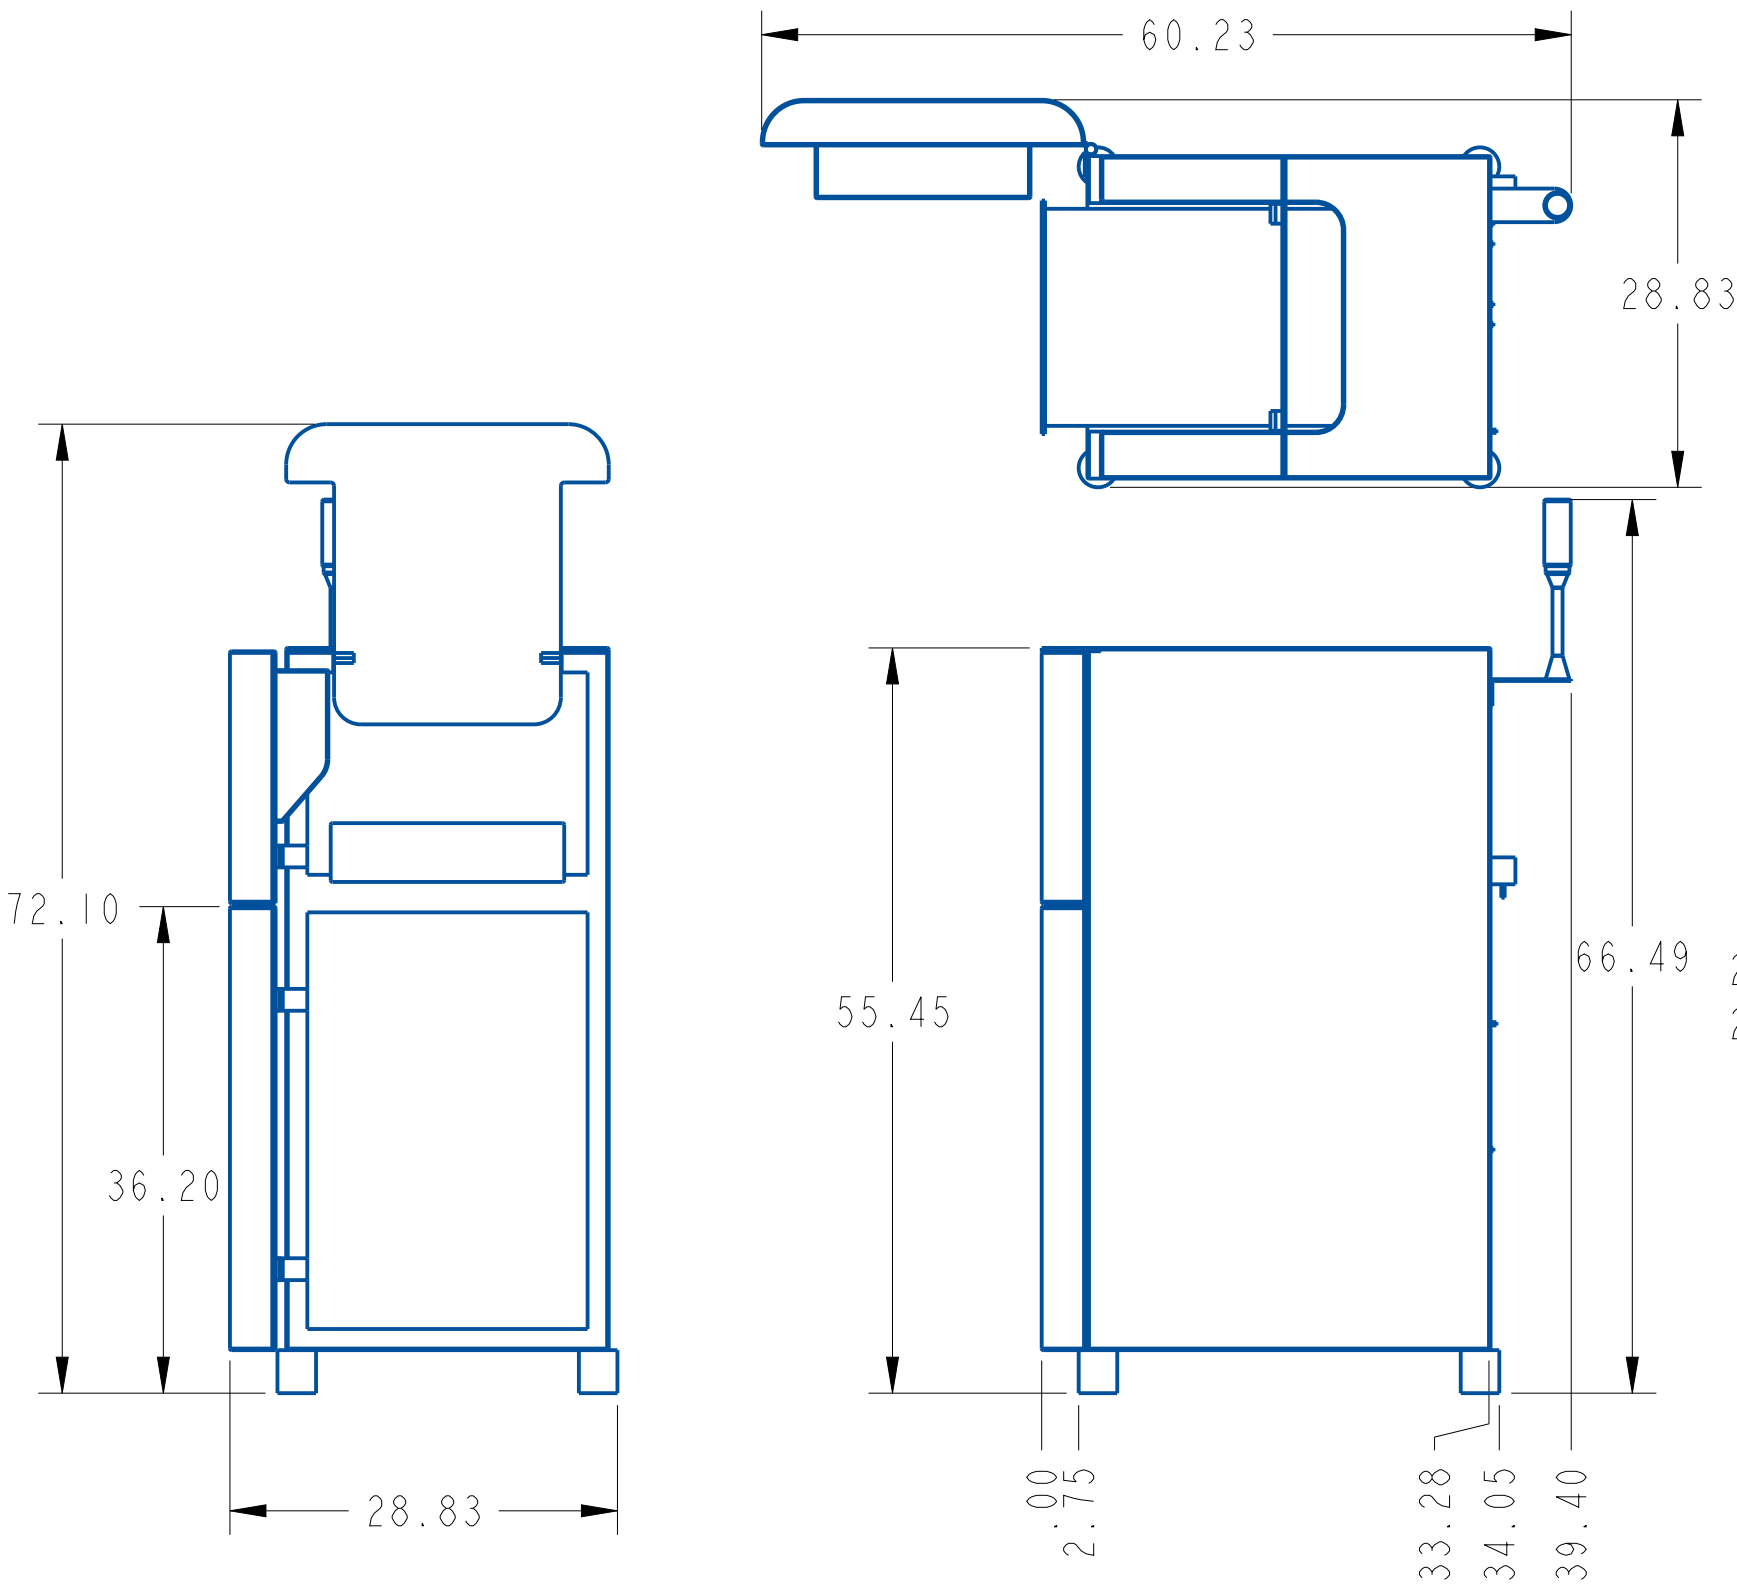

 Cost Effective Equipment		Cost Effective Equipment www.costeffectiveequipment.com	
TITLE Apogee® Mechanical Debonder			
REV A		PART # A-MD	
ALL DIMENSIONS ARE IN INCHES			