
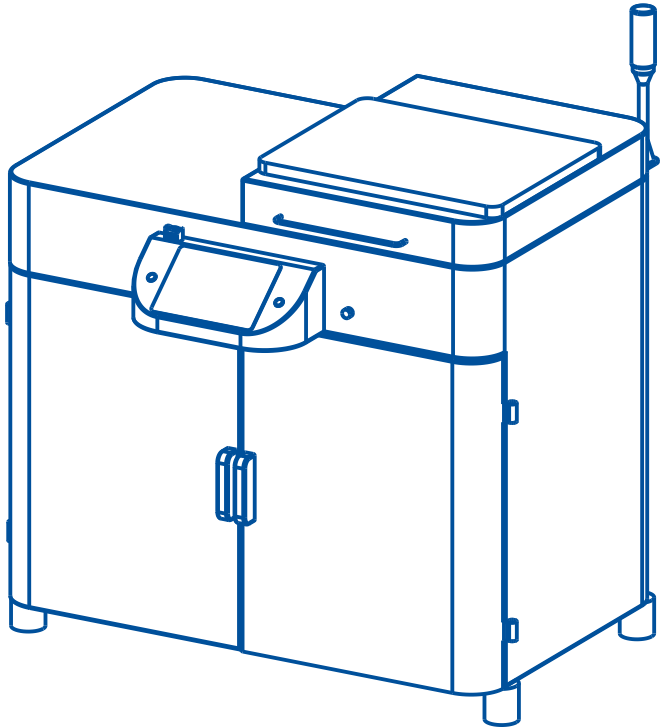
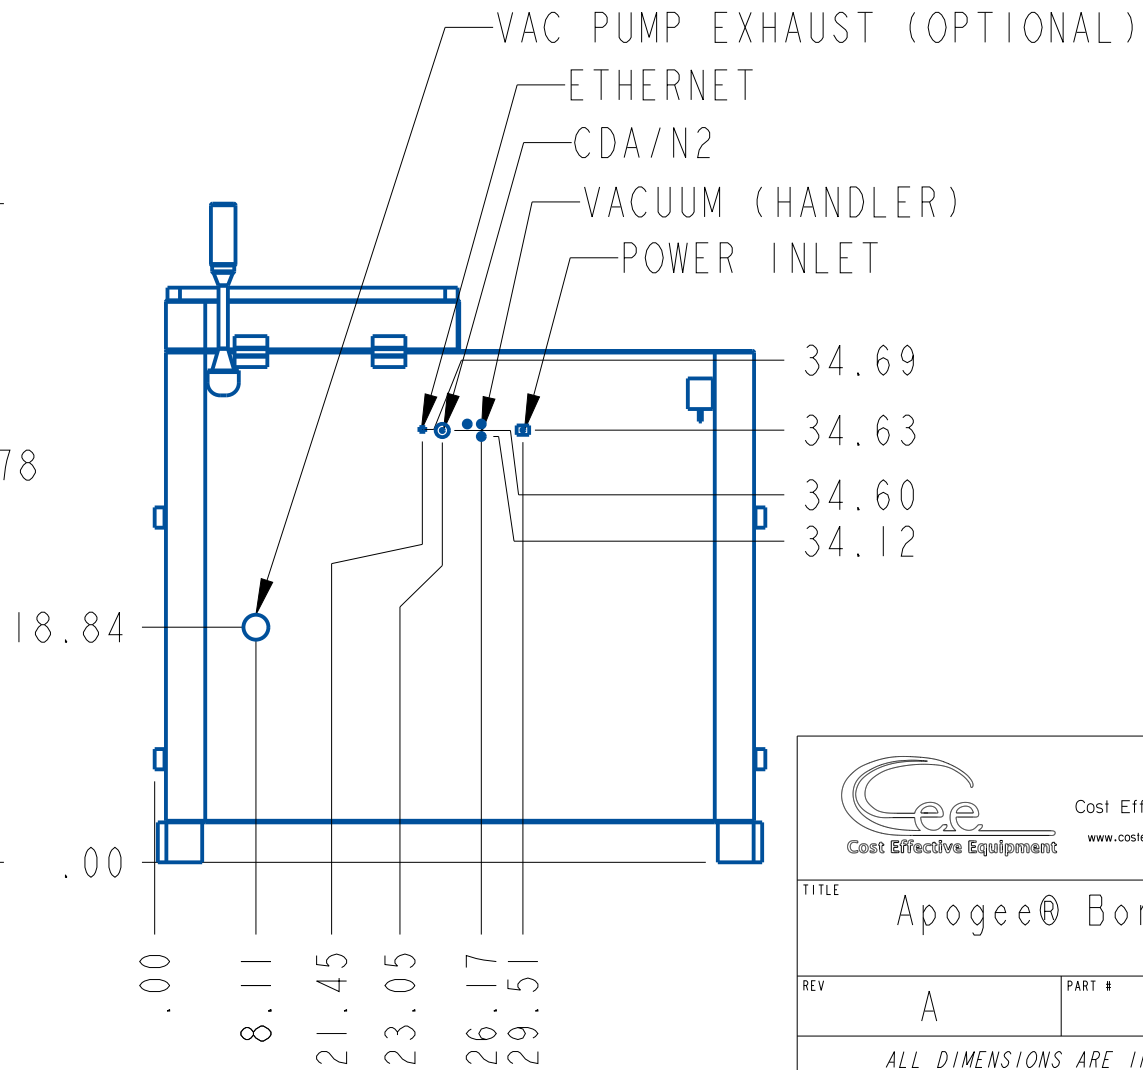
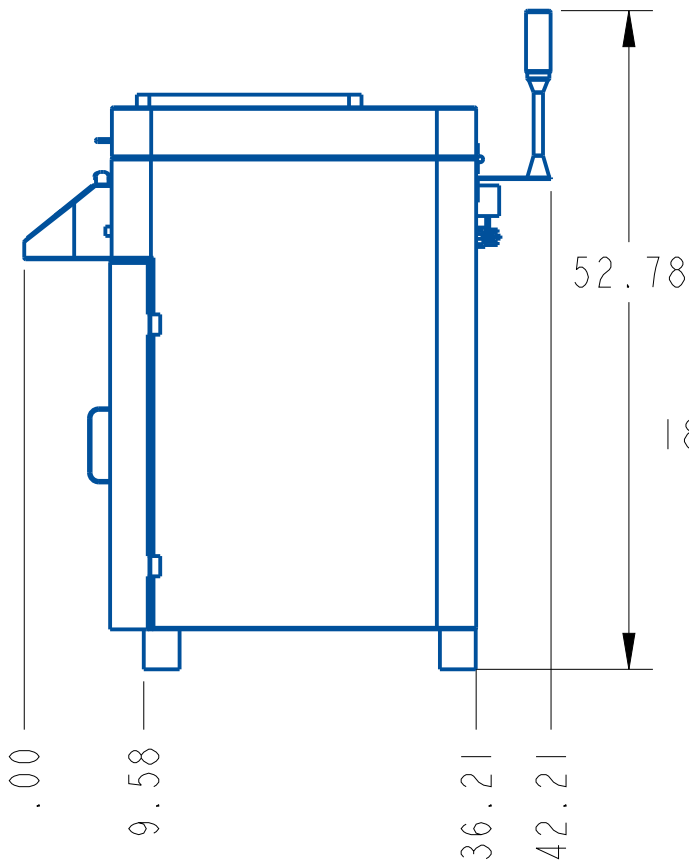
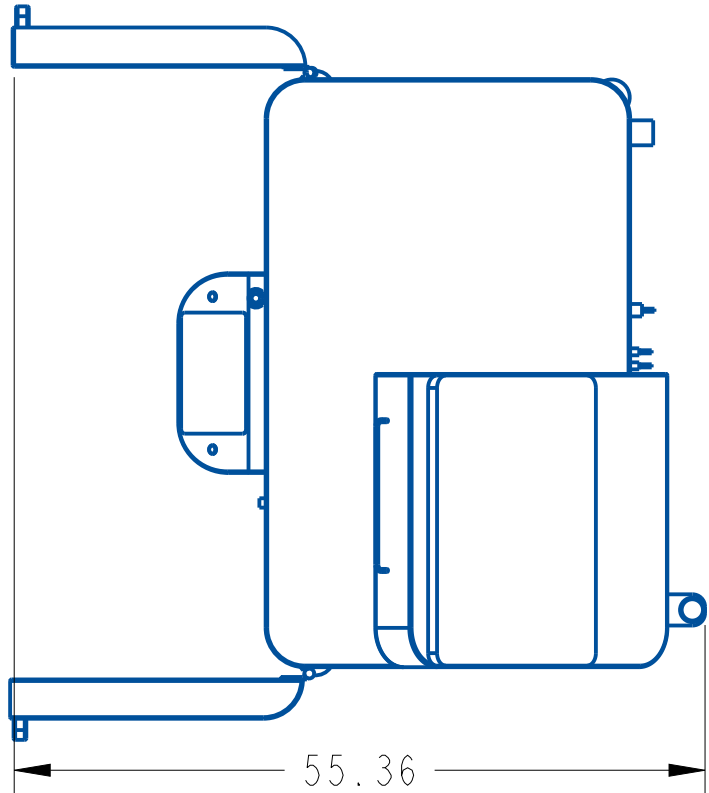


REQUIRED UTILITIES:
ELECTRICAL: 208-230VAC 50/60 HZ SINGLE PHASE, 12.4A MAX, 2839 WATTS
& 100-127/200-240 VAC 50/60HZ SINGLE PHASE, 10A MAX
VACUUM: 20" HG(33kPa) -1/4" PTC (FOR WAFER HANDLING)
N2/CDA: 50 psi(345kPa)-1/4" PTC OR 1/4" FNPT

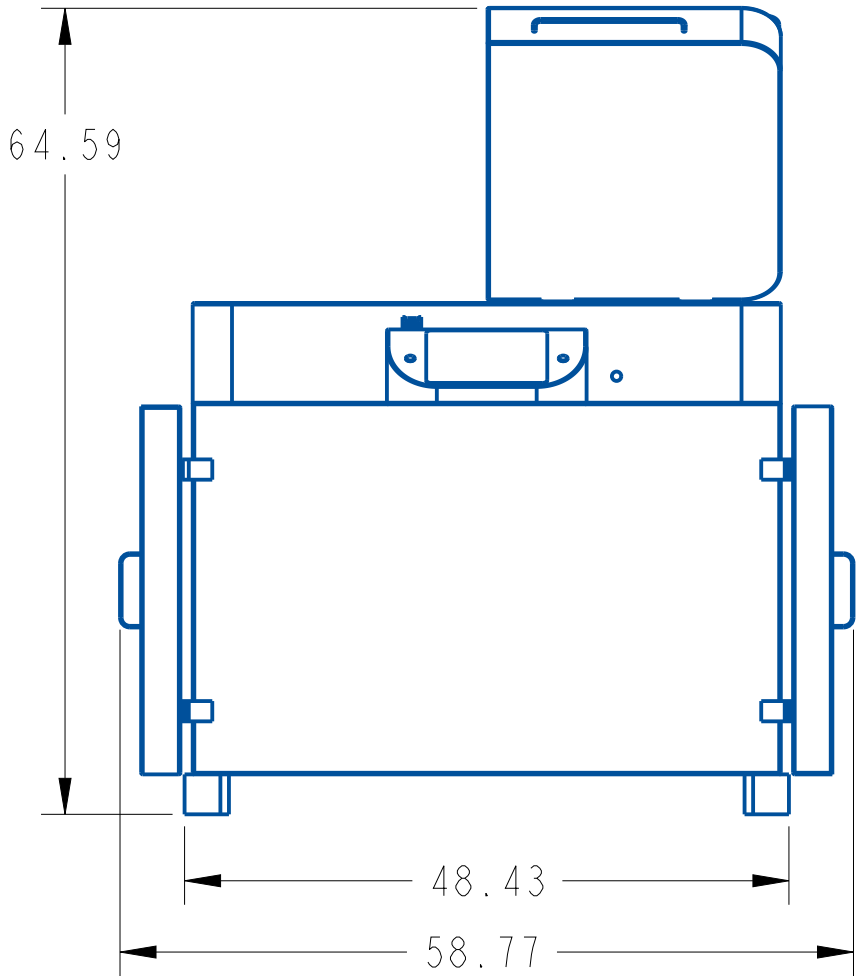

 Cost Effective Equipment		Cost Effective Equipment www.costeffectiveequipment.com	
TITLE Apogee® Bonder			
REV A		PART # A-TB	
ALL DIMENSIONS ARE IN INCHES			