
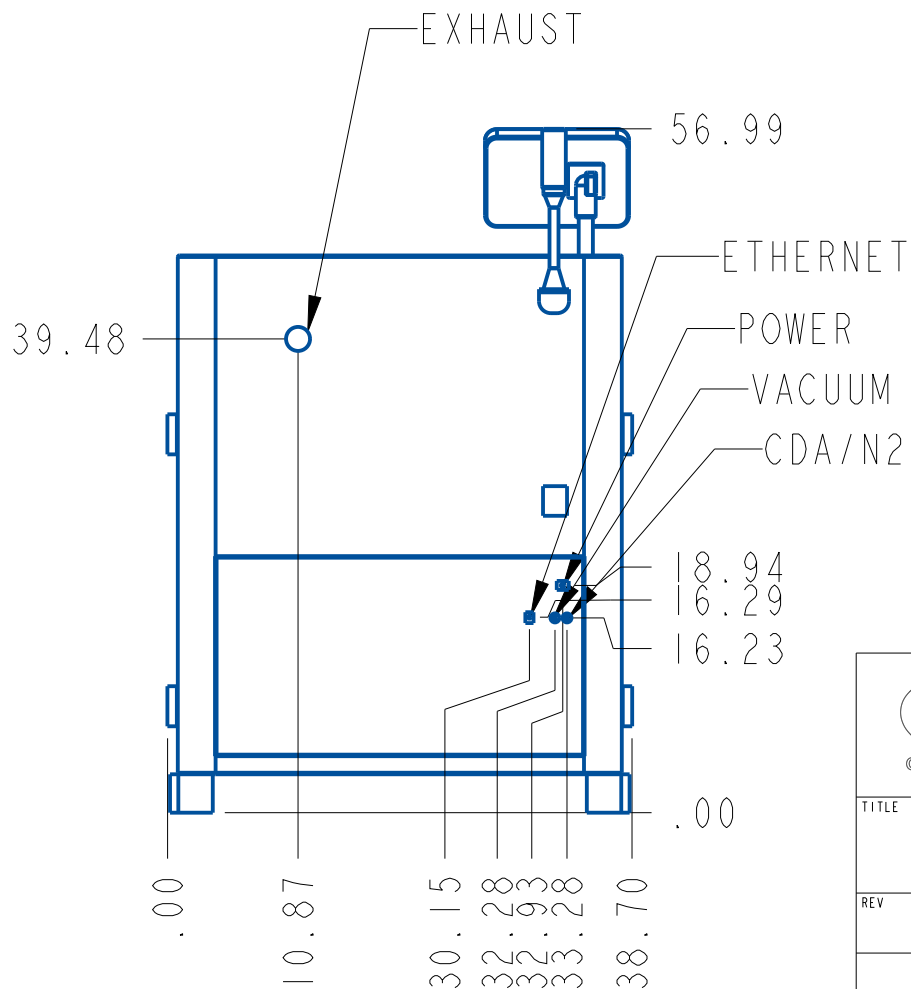
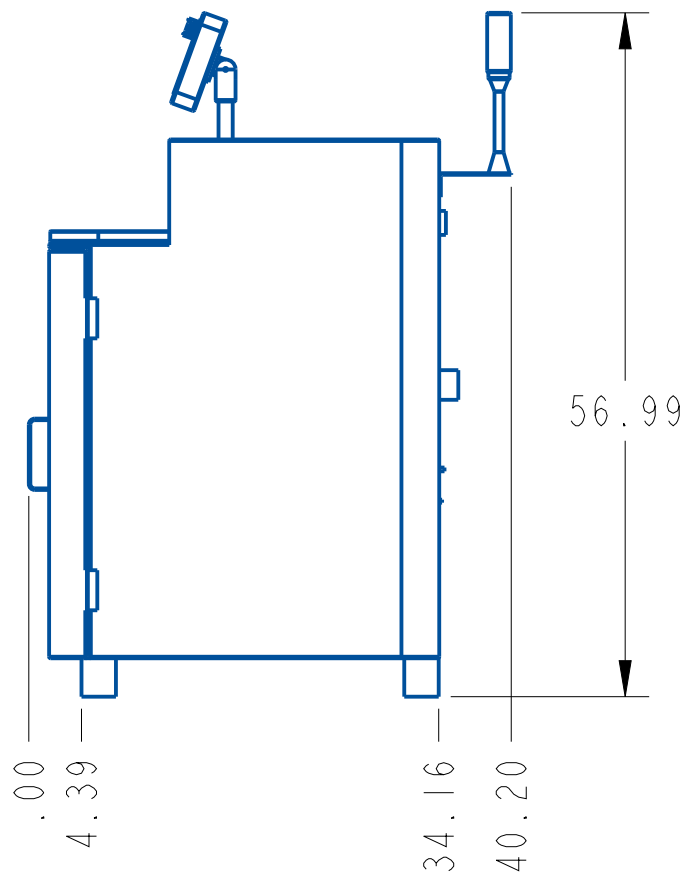
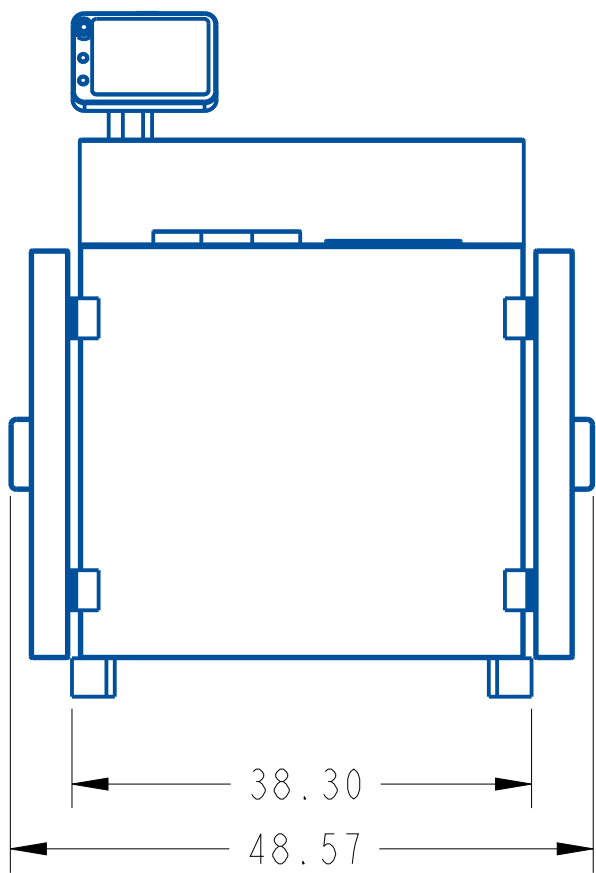
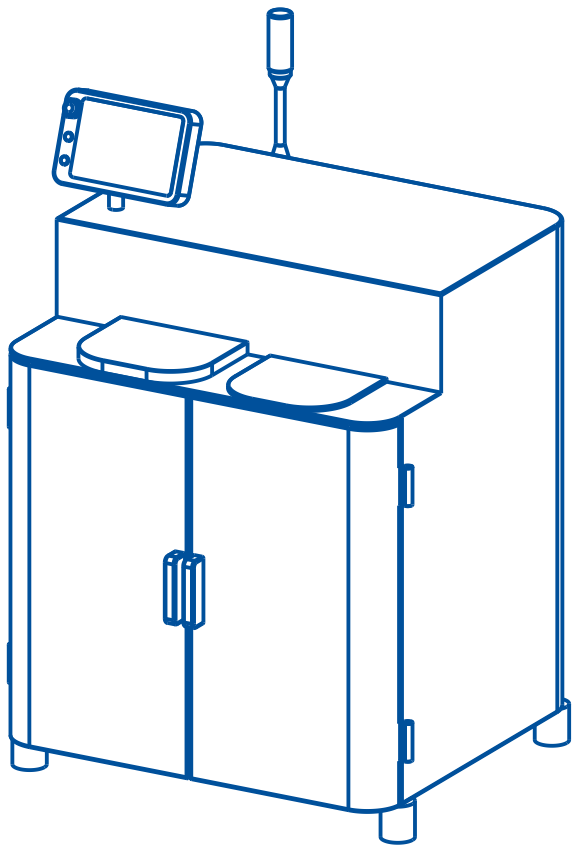


REQUIRED UTILITIES:
ELECTRICAL: 208-230VAC 50/60 HZ SINGLE PHASE, 15.3A MAX, 3519 WATTS
VACUUM: 20" HG(33kPa) -1/4" PTC OR 1/4" FNPT
EXHAUST: 2" OD-0.4" H2O @ 10CFM (100Pa @ 17CMH)
N2/CDA: 70 psi(483kPa)-1/4" PTC OR 1/4" FNPT

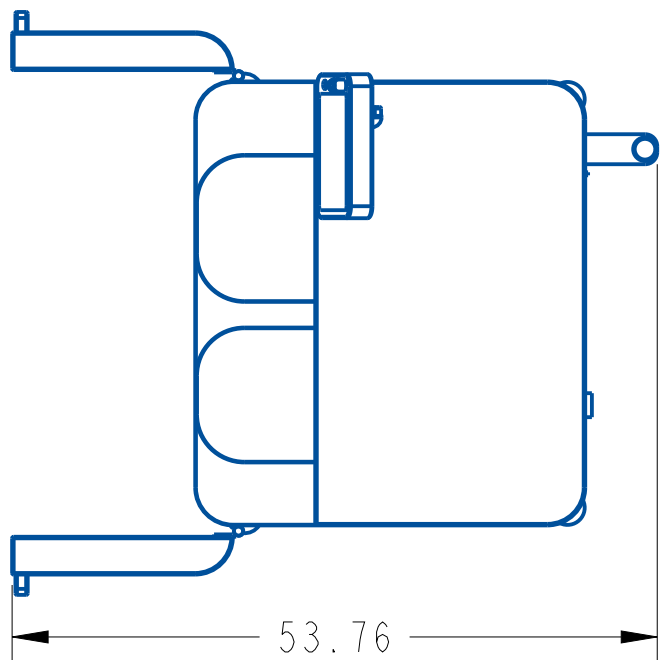

 Cost Effective Equipment www.costeffectiveequipment.com	
TITLE Apogee Thermal Slide Debonder	
REV A	PART # A-TSD
ALL DIMENSIONS ARE IN INCHES	